

Fire Observations from New Instruments

Louis Giglio (University of Maryland) and
many others

GOFC-Gold Land Monitoring Symposium
15-19 April 2013, Wageningen, Netherlands

Major Future Polar Orbiting Satellite Systems

Satellite / Sensor	Resolution	Bands
SAC-D/NIRST (2011)*	~390 m	MIR, TIR
Suomi-NPP VIIRS (2011)*	375 m, 750 m	VIS, NIR, SWIR, MIR, LWIR
TET-1 (2012)*	42 m, 370 m	SW, NIR, MIR, LWIR
LDCM (2013)*	15, 30, 100 m	VIS, NIR, SWIR, LWIR
GMES Sentinel-3 SLST (2014)	500 m - 1 km	VIS, NIR, SWIR, MIR, LWIR
GMES Sentinel-2 MSI (2014)	15, 20, 60 m	VIS, NIR, SWIR
GCOM-C1 SGLI (2014)	250 m, 500 m, 1 km	VIS, NIR, SWIR, LWIR
JPSS VIIRS (2016-)	375 m, 750 m	VIS, NIR, SWIR, MIR, LWIR
HyspIRI (2019)	60 m	VIS - SWIR, MIR, LWIR
Geo-Africa (2014?)	25 m	?, MIR, LWIR

*Recently launched or operational.

Major Future Geostationary Satellite Systems

Satellite / Sensor	Resolution	Bands
India INSAT-3D (2013/2014)	1 – 4 km	VIS, SWIR, MIR, LWIR
JMA Himawari-8 AHI (2014)	500 m – 2 km	VIS, NIR, MIR, LWIR
GOES-R ABI (2015)	500 m – 2 km	VIS, NIR, SWIR, MIR, LWIR
CMA FY-4A AGRI (2015)	500 m – 4 km	VIS, NIR, MIR, LWIR
MTG-I1 FCI (> 2018)	500 m – 2 km	VIS, NIR, MIR, LWIR
GEO-KOMPSAT-2A AMI (> 2017)	500 m – 2 km	VIS, NIR, MIR, LWIR
Russia Elektro-M MSU-GSM (2017)	500 m – 2 km	VIS, NIR, SWIR, MIR, LWIR

SAC-D

- SAC-D (Satelite de Aplicaciones Cientificas-D)
launched July 2011
- Instrument suite includes NIRST (New IR Sensor Technology)
 - One MWIR band + 2 LWIR bands
 - Not functioning


NPP VIIRS and JPSS VIIRS

- JPSS (formerly NPOESS)
 - Joint Polar Satellite System
 - JPSS-1 launch 2016; 13:30 overpass
 - JPSS-2 launch 2019; 17:30 overpass
- Suomi-NPP
 - NPOESS Preparatory Mission
 - Launched 28 October 2011

JPSS Sensors

MIS	μwave Imager/Sounder
VIIRS	Visible/Infrared Imager
CrIS	Infrared Sounder
ATMS	Microwave Sounder
OMPS	Ozone
ADCS	Data Collection
SEM-N	Space Environment
SARSAT	Search & Rescue
CERES	Solar Irradiance

Visible Infrared Imaging
Radiometer Suite

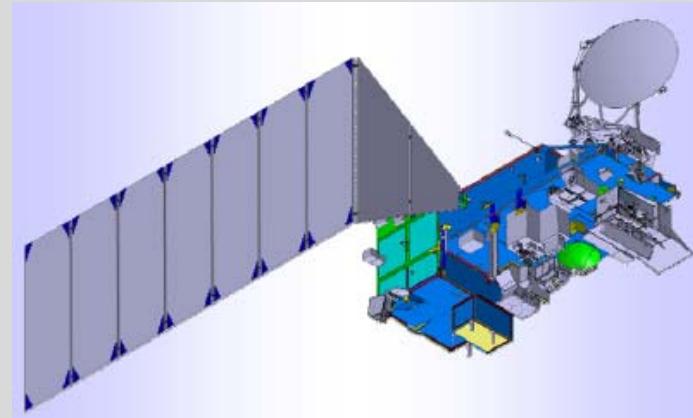

	1330	1730	NPP
VIIRS	X	X	X
MIS	X	X	
CrIS	X		X
ATMS	X		X
OMPS	X		X
ADCS	X	X	
SARSAT	X	X	
CERES	X		X
SEM-N	X	X	

VIIRS at a Glance

- VIIRS: Visible Infrared Imager Radiometer Suite
- VIIRS Heritage
 - OLS: Optical Line Scanner
 - AVHRR: Advanced Very High Resolution Radiometer
 - SeaWiFS: Sea viewing Wide Field-of-view Sensor
 - MODIS: Moderate Resolution Imaging Spectroradiometer
- VIIRS will provide operational and research users with:
 - Spectral coverage from 412 nm to 12 microns in 22 bands
 - Imagery at 375 m nadir resolution in 5 bands
 - Moderate resolution (750 m at nadir) radiometric quality data
 - Complete global daily coverage with a single sensor
- Near-real time data products
 - Cloud cover, cloud layers
 - Cloud and aerosol physical properties
 - Land & ocean biosphere properties, snow & ice
 - Sea Surface Temperature, Land & Ice Temperatures
 - **Fire detection**

Comparison of MODIS & VIIRS Bands

MODIS		VIIRS	
Band #	λ	λ	Band ID
1	620 - 670	600 - 680	I-1
2	841 - 876	845 - 885	I-2
3	459 - 479		
4	545 - 565		
5	1230 - 1250	1230 - 1250	M-8
6	1628 - 1652	1580 - 1670	M-10
		1580 - 1610	I-3
7	2105 - 2155	2225 - 2275	I-11
8	405 - 420	402-422	M-1
9	438 - 448	436-454	M-2
10	483 - 493	478-498	M-3
11	526 - 536		
12	546 - 556	545-565	M-4
13	662 - 672	662-682	M-5
14	673 - 683		
15	743 - 753	739-754	M-6
16	862 - 877	846-885	M-7
17	890 - 920		
18	931 - 941		
19	915 - 965		

MODIS bands 1-2 are 250 m at nadir

MODIS bands 3-7 are 500 m at nadir

MODIS bands 8-36 are 1000 m at nadir

MODIS		VIIRS	
Band #	λ	λ	Band ID
20	3.660 - 3.840	3.610 - 3.790	M-12
		3.550 - 3.930	I-4
21	3.929 - 3.989		
22	3.940 - 4.001		
23	4.020 - 4.080	3.973 - 4.128	M-13
24	4.433 - 4.498		
25	4.482 - 4.549		
26	1.360 - 1.390	1.371--1.386	M-9
27	6.535 - 6.895		
28	7.175 - 7.475		
29	8.400 - 8.700	8.400 - 8.700	M-14
30	9.580 - 9.880		
31	10.780 - 11.280	10.263 - 11.263	M-15
		10.050 - 12.400	I-5
32	11.770 - 12.270	11.538 - 12.488	M-16
33	13.185 - 13.485		
34	13.485 - 13.785		
35	13.785 - 14.085		
36	14.085 - 14.385		

VIIRS bands I1-I5 are 371 m at nadir

VIIRS bands M-1-M-16 are 742 m at nadir

VIIRS Sensor Bands

		Band No.	Wavelength (μm)	Horiz Sample Interval (km Downtrack x Crosstrack)		Driving EDRs	Radiance Range	Ltyp or Ttyp
				Nadir	End of Scan			
VIS/NIR FPA Silicon PIN Diodes	M1	0.412	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	44.9 155	
	M2	0.445	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	40 146	
	M3	0.488	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	32 123	
	M4	0.555	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	21 90	
	I1	0.640	0.371 x 0.387	0.80 x 0.789	Imagery	Single	22	
	M5	0.672	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	10 68	
	M6	0.746	0.742 x 0.776	1.60 x 1.58	Atmospheric Corr'n	Single	9.6	
	I2	0.865	0.371 x 0.387	0.80 x 0.789	NDVI	Single	25	
	M7	0.865	0.742 x 0.259	1.60 x 1.58	Ocean Color Aerosols	Low High	6.4 33.4	
CCD	DNB	0.7	0.742 x 0.742	0.742 x 0.742	Imagery	Var.	6.70E-05	
S/MWIR PV HgCdTe (HCT)	M8	1.24	0.742 x 0.776	1.60 x 1.58	Cloud Particle Size	Single	5.4	
	M9	1.378	0.742 x 0.776	1.60 x 1.58	Cirrus/Cloud Cover	Single	6	
	I3	1.61	0.371 x 0.387	0.80 x 0.789	Binary Snow Map	Single	7.3	
	M10	1.61	0.742 x 0.776	1.60 x 1.58	Snow Fraction	Single	7.3	
	M11	2.25	0.742 x 0.776	1.60 x 1.58	Clouds	Single	0.12	
	I4	3.74	0.371 x 0.387	0.80 x 0.789	Imagery Clouds	Single	270 K	
	M12	3.70	0.742 x 0.776	1.60 x 1.58	SST	Single	270 K	
	M13	4.05	0.742 x 0.259	1.60 x 1.58	SST Fires	Low High	300 K 380 K	
	M14	8.55	0.742 x 0.776	1.60 x 1.58	Cloud Top Properties	Single	270 K	
LWIR PV HCT	M15	10.763	0.742 x 0.776	1.60 x 1.58	SST	Single	300 K	
	I5	11.450	0.371 x 0.387	0.80 x 0.789	Cloud Imagery	Single	210 K	
	M16	12.013	0.742 x 0.776	1.60 x 1.58	SST	Single	300 K	

VIIRS Fire Status: Algorithm

- Current algorithm/product in poor shape
 - Modified MODIS Collection 4 algorithm
 - No fire mask, no FRP
 - Product is simply a list of fire pixel locations
 - No higher level fire products
 - *Relatively simple to fix (software)*
 - NASA/NOAA to develop replacement algorithms

VIIRS Fire Status: Sensor

- In some respects superior to MODIS
 - Spatial coverage
 - Spatial resolution
 - Radiometric calibration
 - Crosstalk
- LWIR band (M15) saturation too low
- Primary fire band (M13) susceptible to more atmospheric absorption than heritage instruments
- On-board aggregation flawed
 - Saturated pixels not properly handled
- Idiosyncratic features due to unusual lineage



NASA

January 2012 VIIRS True Color Composite

DLR TET-1

New Instruments for Fire Observations

E. Lorenz

**German Aerospace Center DLR
Institute for Optical Information Systems**




The current BIRD follow-up Program in Germany

The TET-1 Satellite




- Based on the BIRD Satellite Technology the German Space Agency initiated in 2005 the OOV Program
- The first programme part was finalised with the launch of the TET-1 Satellite on 22 July 2012
- The TET Satellite is primary dedicated to technological experiments and not to fire monitoring
- A BIRD like IR Instrument was added later
- In the first year the observation time has to be shared with other, but smaller instruments

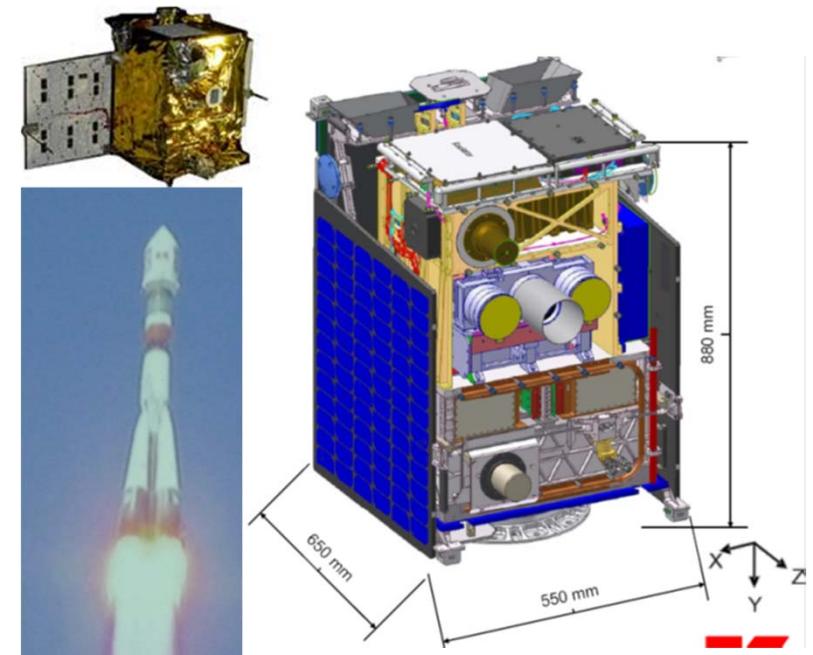

The current BIRD follow Program in Germany


The TET-1 Satellite

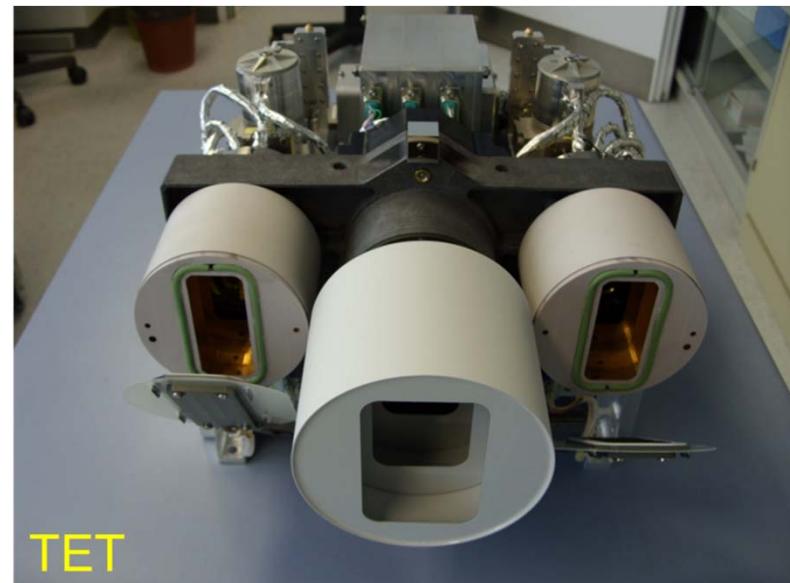

- The basic Parameters for the IR instrument on TET are mainly the same as for the BIRD instrument
- Compared to BIRD a powerful on board processing will be implemented dedicated to the generation of high level fire observation data products



	3 Line-Camera (3 Line FPA)	2 Infrared- Cameras (identical Design)
Wavelength	Line 1 460 - 560 nm Line 2 565 - 725 nm Line 3 790 - 930 nm	MWIR: 3,4 - 4,2 µm; LWIR: 8,5-9,3 µm
Focal Length	90,9 mm	46,39 mm
FOV	19,6°	19°
F-number	3,8	2,0
Detector	CCD- Line Array	CdHgTe Arrays
Detector Cooling	Passiv, 20 ° C	Stirling, 80 - 100 K
Pixel Size	7 µm x 7 µm	30 µm x 30 µm
Number of Pixels	3x5164	2 x 512 staggered
Quantization	14 bit	14 bit
Ground Resolution	40,4 m	356 m
Abtastweite	40,4 m	178 m
Schwadbreite	211 km km	178 km
In-flight_ Kalibration	no	Black Body Flaps

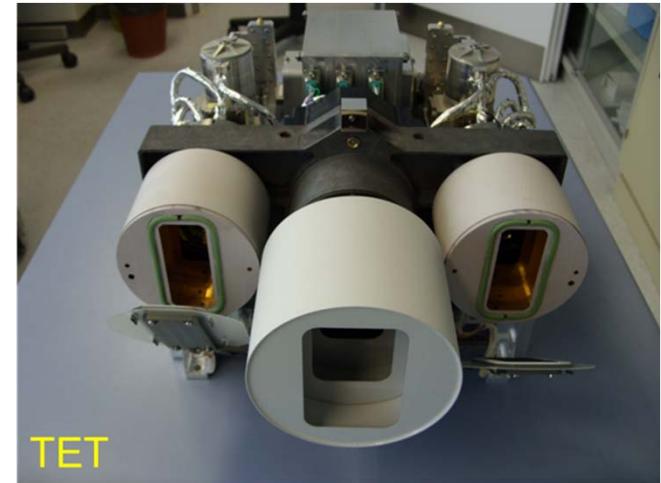


- The TET Payload consists on 2 IR Cameras and a 3 Line CCD Camera.
- On board of TET is implemented a powerful data processing unit to deliver real time data products






First Data Take 27. 07. 2012 over the Mediterranean Sea



orbit trace

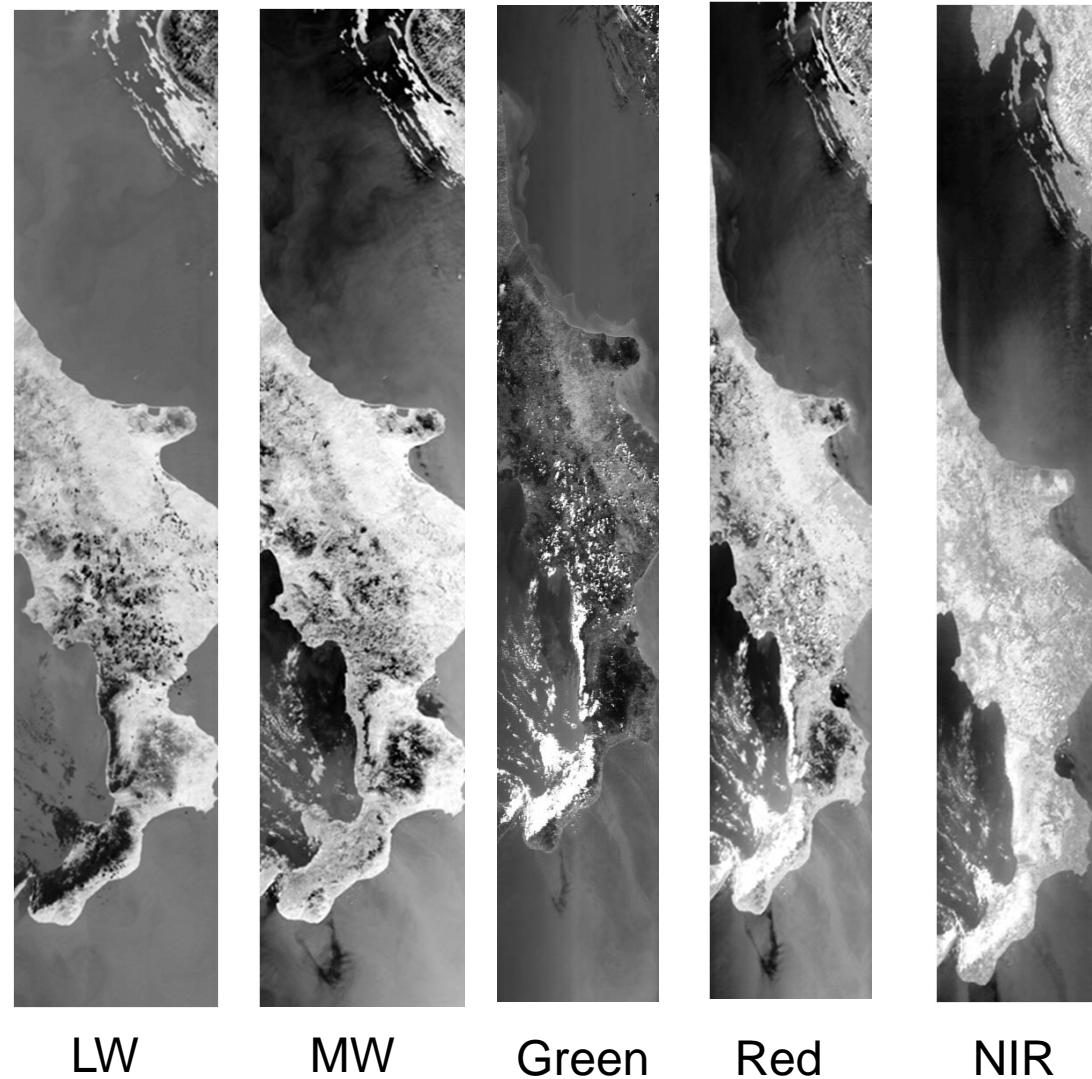




Data Take 11. 11. 2012 Honduras/ Nikaragua; VIS-1 Mode

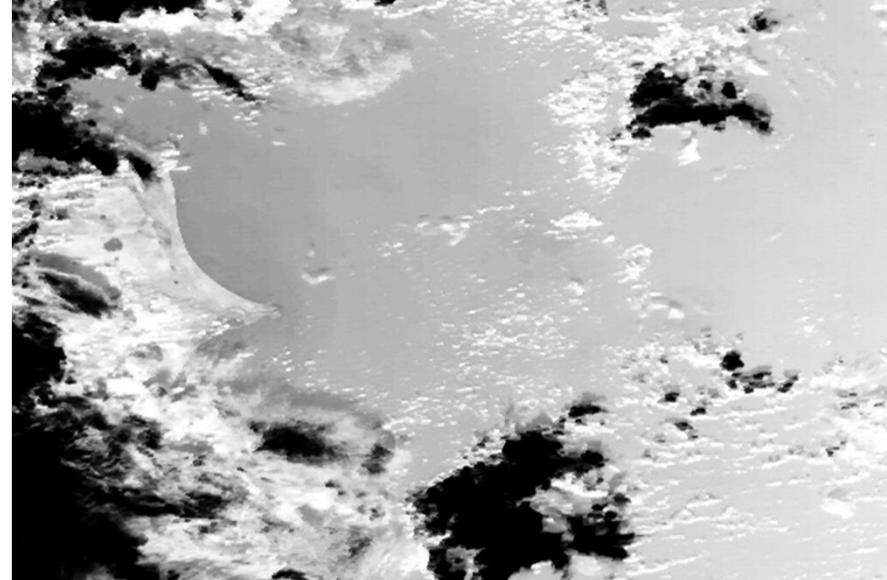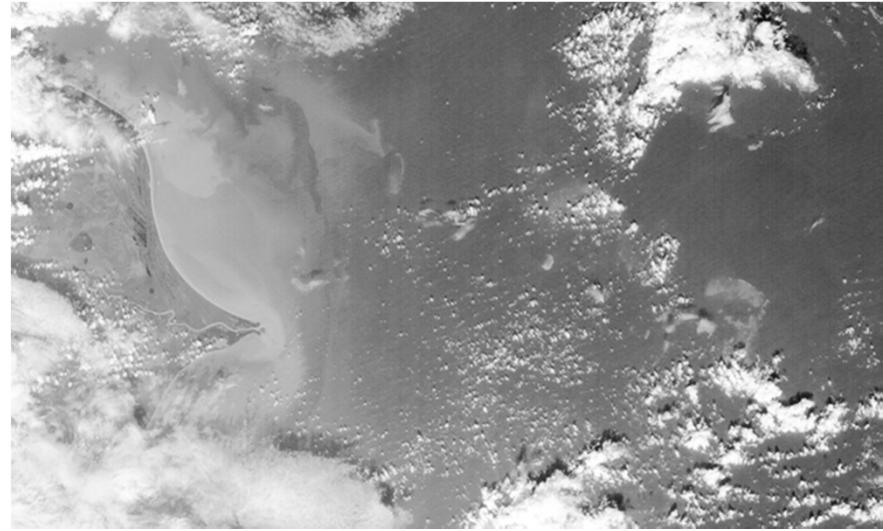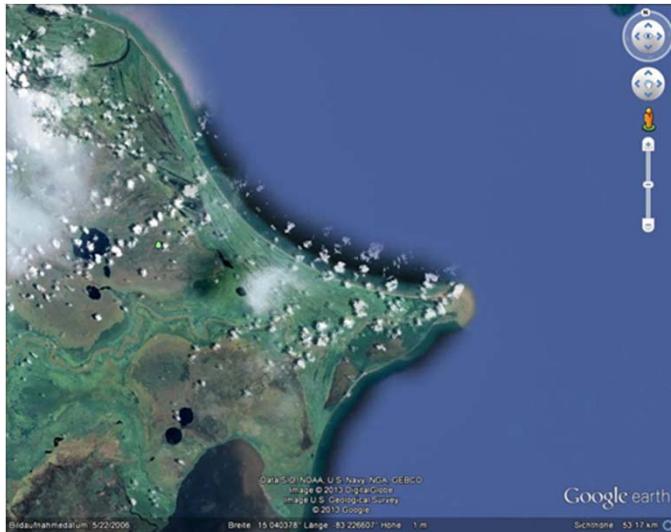

Due to the scheduling of the OOV Program it is currently difficult to select a dedicated target. The OOV Program will stop in the end of this year. After that TET will be dedicated to the Earth observation.




Data Take 18. 01. 2013 01:41:03 UTC Kamisu, Japan;

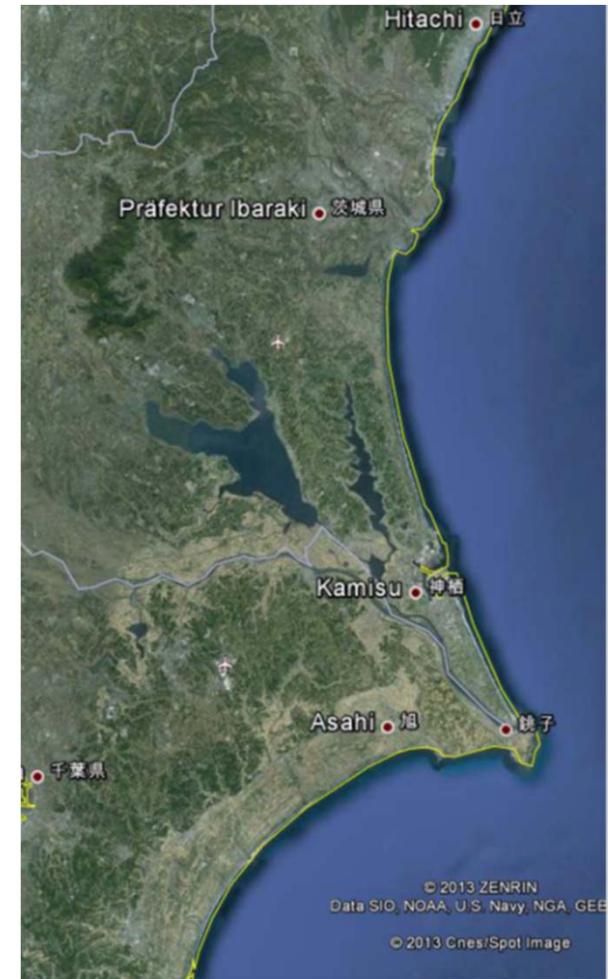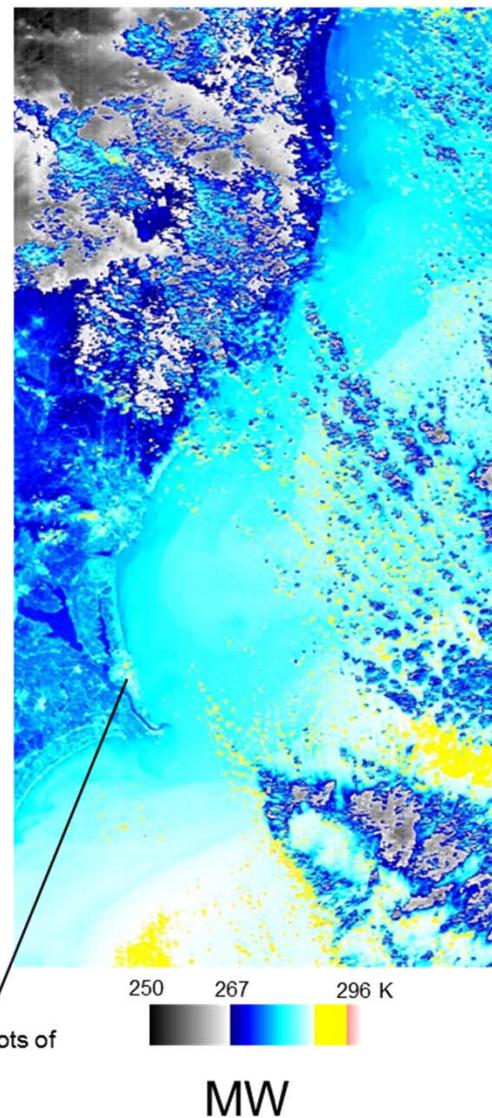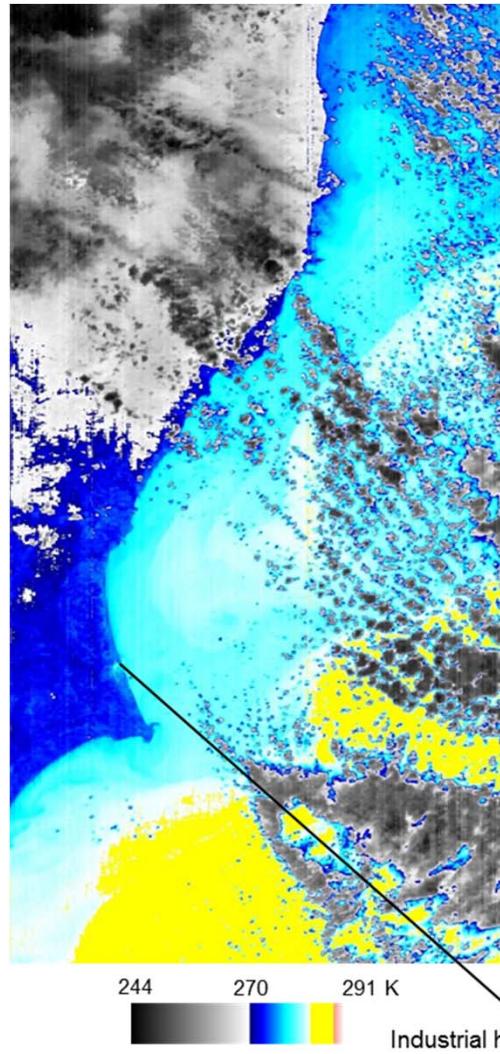


The BIROS Satellite

- The development of the BIROS satellite bus system will be similar to the TET– 1 satellite.
- For the two –satellite - constellation of BIROS with TET-1 is planned to have an node spacing angle between BIROS and TET-1 of 90° , to provide a potential revisit time < 6.5 h.,.
- Therefore, an additional BIROS feature compared to TET-1 - will be a propulsion Sub-system for the orbit control.
- The Optical Payload will be identical to this of TET
- The launch is planned for the second half of 2014

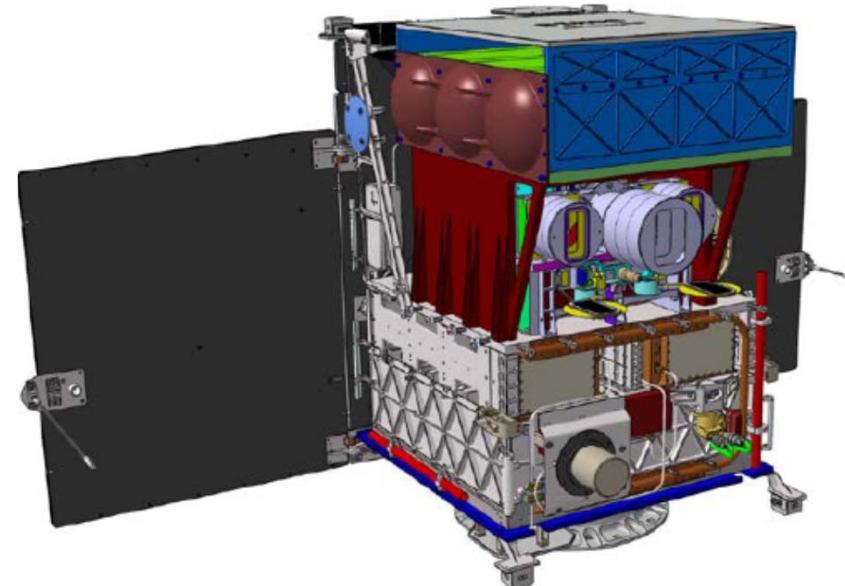

The Service Segment

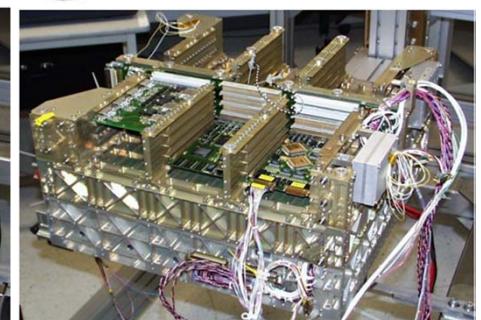

The Electronics Segment



USGS/NASA Landsat Data Continuity Mission (LDCM)

- “Landsat 8”
- Two sensors
 - Operational Land Imager (OLI)
 - SNR much higher than that of Landsat 7
 - Thermal Infrared Sensor (TIRS)
- Launched 11 February 2013

LDCM Spectral Bands



L7 ETM+ Bands	LDCM OLI/TIRS Band Requirements	
	30 m, Coastal/Aerosol, 0.433–0.453 µm (*A)	Band 1
Band 1 30 m, Blue, 0.450 - 0.515 µm	30 m, Blue, 0.450–0.515 µm	Band 2
Band 2 30 m, Green, 0.525 - 0.605 µm	30 m, Green, 0.525–0.600 µm	Band 3
Band 3 30 m, Red, 0.630 - 0.690 µm	30 m, Red, 0.630–0.680 µm	Band 4
Band 4 30 m, Near-IR, 0.775 - 0.900 µm	30 m, Near-IR, 0.845–0.885 µm	Band 5
Band 5 30 m, SWIR-1, 1.550 - 1.750 µm	30 m, SWIR-1, 1.560–1.660 µm	Band 6
Band 7 30 m, SWIR-2, 2.090 - 2.350 µm	30 m, SWIR-2, 2.100–2.300 µm	Band 7
Band 8 15 m, Pan, 0.520 - 0.900 µm	15 m, Pan, 0.500–0.680 µm	Band 8
	30 m, Cirrus, 1.360–1.390 µm (*B)	Band 9
Band 6 60m, LWIR, 10.00–12.50 µm	100 m, LWIR-1, 10.30–11.30 µm (*C)	Band 10
	100 m, LWIR-2, 11.50–12.50 µm (*C)	Band 11

Source: NASA/USGS NP-2009-11-109-GSFC

OLI First Light Image (True Color)



NASA

Wyoming and Colorado, USA

18 March 2013

OLI First Light Image (False Color SWIR/NIR/green)



NASA


Wyoming and Colorado, USA

18 March 2013


ESA Sentinel-2 MSI

- Multi Spectral Instrument (MSI)
- Designed for continuity of Landsat and SPOT-type systems
- High resolution visible – SWIR bands
 - 10 m, 20 m, 60 m
- 290 km swath
- 2014 launch
- 5-day revisit time with **two satellites** operating concurrently
- Fuel mapping, burned area mapping, active fire detection using SWIR bands (?)


Sentinel-3 (2014)

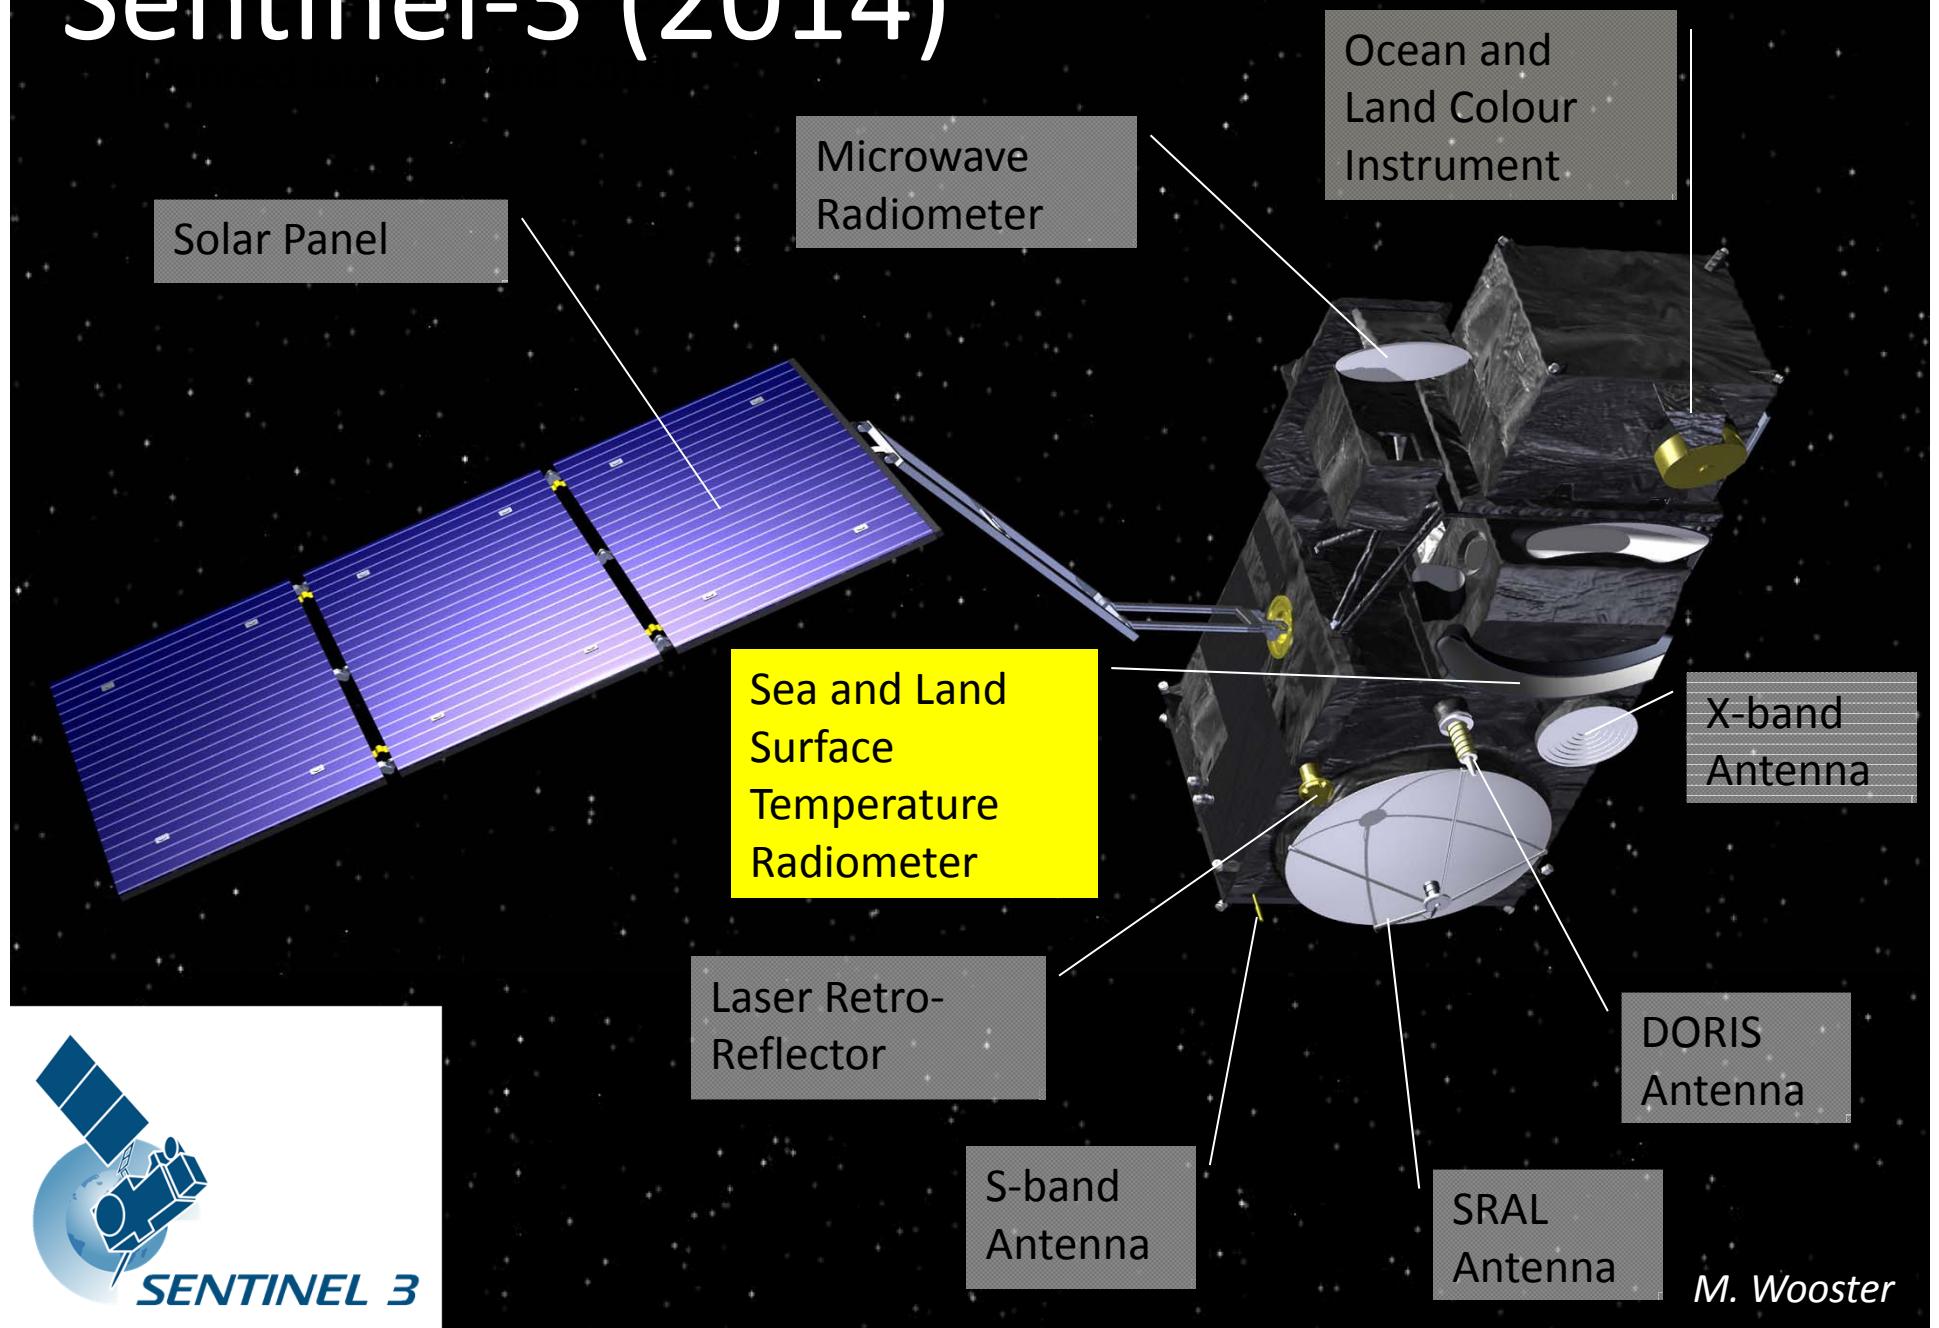


Sentinel-3 Optical Instrument Resolution

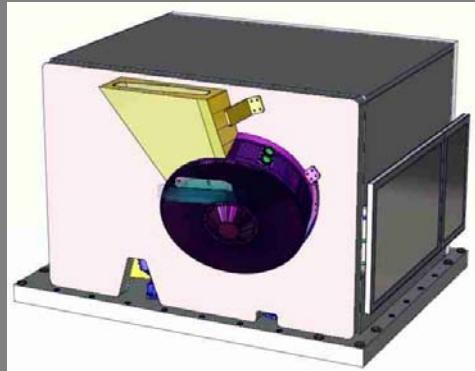

Pushbroom type imager spectrometer
21 Spectral Channels
Full Resolution: Coastal/Land
Reduced Resolution: Open Ocean




OLCI – Open ocean	1.2 km
OLCI – Coastal ocean	300 m
OLCI - Land	300 m
SLSTR – Solar channels	500 m
SLSTR – Thermal channels	1 km

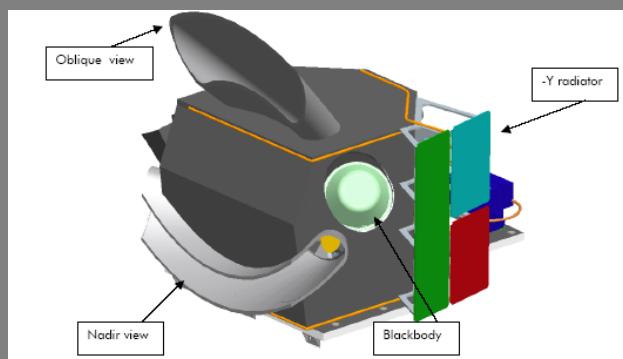

Conical imaging radiometer with a dual view capability:
• Near-nadir view
• Inclined view with an OZA of 55°
9 Spectral Channels + 2 (option) for Active FIRE

SLSTR Overview

- Heritage from AATSR, dual-view (nadir and backard) required for aerosol corrections:
 - Nadir swath $>74^\circ$ (1300 km min up to 1800 km)
 - Dual view swath 49° 750 km
 - Nadir swath covering OLCI
- 9 spectral bands:
 - Visible : 555 – 659 - 859 nm
 - SWIR : 1.38 – 1.61 – 2.25 μm
 - TIR : 3.74 – 10.85 – 12 μm
- One Vis/IR channel used for co-registration with OLCI

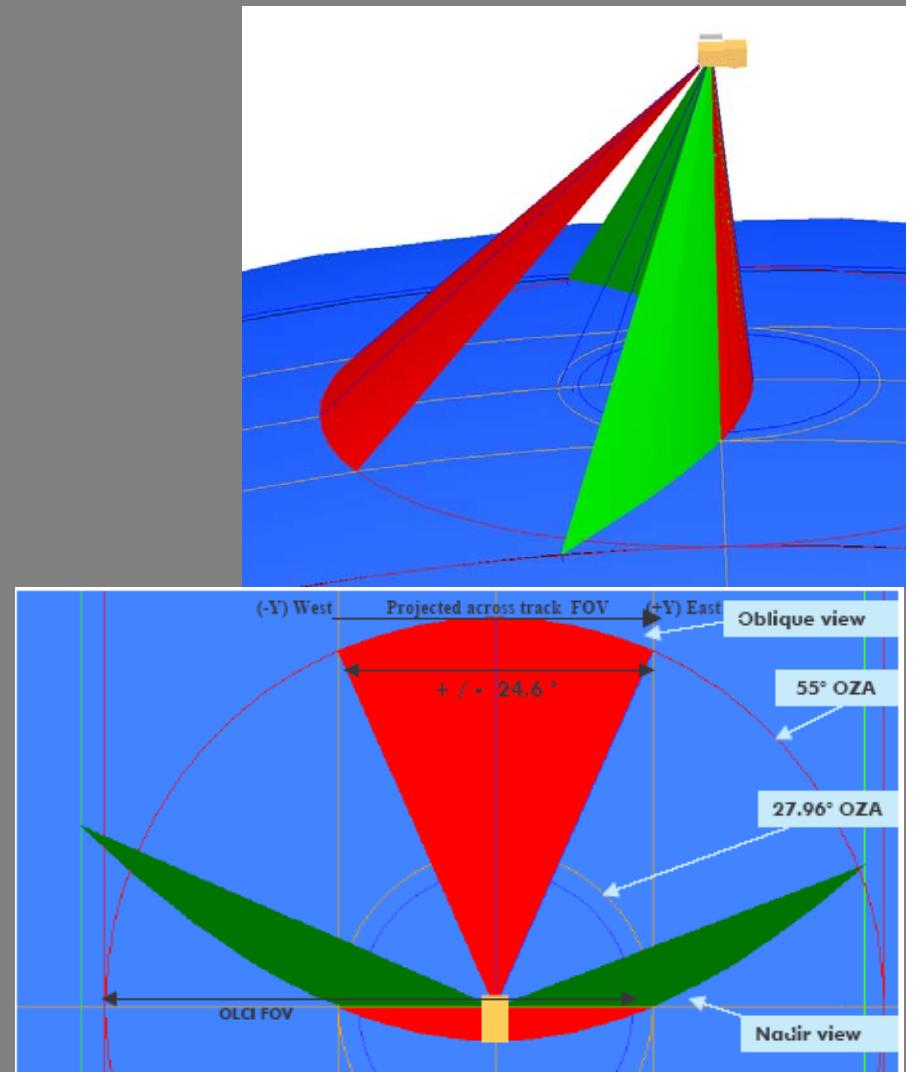


Sentinel-3 SLSTR Details

Band #	Centre λ_{centre} μm	Spectral Width $\Delta\lambda$ μm	Ref SSD
S1	0.555	0.02	0.5km
S2	0.659	0.02	0.5km
S3	0.865	0.02	0.5km
S4	1.375	0.15	0.5km
S5	1.61	0.06	0.5km
S6	2.25	0.05	0.5km
S7	3.74	0.38	1km
S8	10.85	0.9	1km
S9	12.0	1.0	1km
F1	3.74	0.38	1km
F2	10.85	0.9	1km

- SLSTR takes two views of Earth location within a few minutes (similar AATSR)
- Expanded Swaths@ ~1675 km (nadir view) + ~750 km (forward view)
- Extended dynamic range “fire channels” (F1 & F2)
- Two sun-synchronous Sentinel-3 satellites, local solar time ~ 10:00am
- Two satellites to obtain ~0.5 day revisit time.

SLSTR Algorithm Prototyping & Testing (tested with MODIS MOD21data)

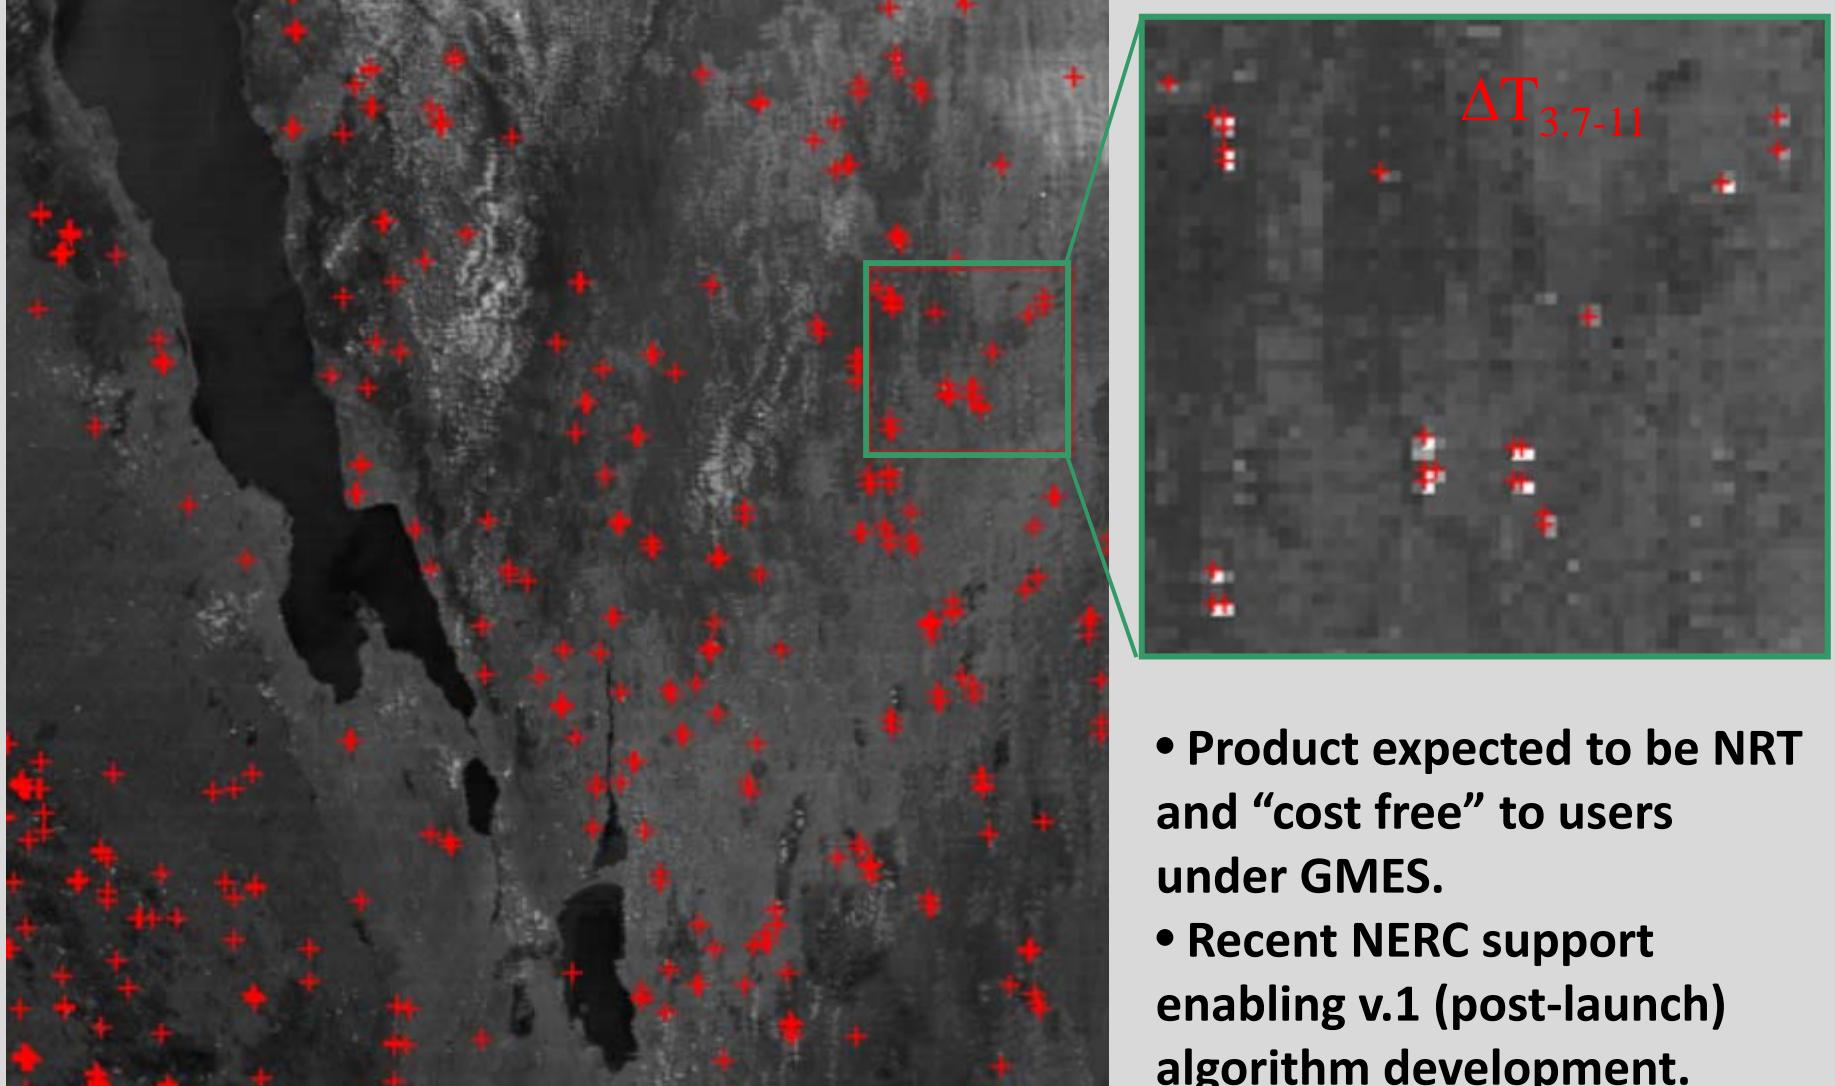

Multiple low FRP fires in Africa (Lake Malawi)

M. Wooster

JAXA GCOM

- Global Change Observation Missions

GCOM Satellites

- GCOM-W1 (“SHIZUKU”)
 - Launched May 2012
 - Advanced Microwave Scanning Radiometer 2 (AMSR2)
- GCOM-C1
 - Second generation Global Imager (SGLI)
 - Launch 2014
- GCOM-W2 (2016), GCOM-C2 (2017), GCOM-W3 (2020), GCOM-C3 (2021)

CGOM-C1

- Orbit
 - Sun synchronous orbit
 - Height: about 800km
 - Local time of descending node: 10:30
- Weight: about 2.0t
- Power Consumption: about 4.3kW
- Lifetime: 5 years
- Data transmission
 - Global observation data are stored and transmitted every orbit period
 - Observed data over Japanese islands are transmitted to JAXA ground station in real time

SGLI

- Wide spectrum coverage
- VIS, NIR, SWIR, TIR
- Polarization measurements
- Multiple angle observation
- Multiple telescopes

VNIR						<i>H. Shimoda</i>
Ch.	central wavelength [nm]	IFOV [m]	$\Delta\lambda$ [nm]	$L\lambda$ [W/m ² /str/ μ m]	L_{max} [W/m ² /str/ μ m]	S/N
VN1	380	250	10	60	210	250
VN2	412	250	10	75	250	400
VN3	443	250	10	64	400	300
VN4	490	250	10	53	120	400
VN5	530	250	20	41	350	250
VN6	565	250	20	33	90	400
VN7	670	250	10	23	62	400
VN8	670	250	20	25	210	250
VN9	763	1000	8	40	350	400
VN10	865	250	20	8	30	400
VN11	865	250	20	30	270	200

Polarization channels (3 directions)

Ch.	central wavelength [nm]	IFOV [m]	$\Delta\lambda$ [nm]	$L\lambda$ [W/m ² /str/ μ m]	$L_{max \cdot}$ [W/m ² /str/ μ m]	S/N
P1-1	670	1000	20	25	250	250
P1-2	670	1000	20	25	250	250
P1-3	670	1000	20	25	250	250
P2-1	865	1000	20	30	300	250
P2-2	865	1000	20	30	300	250
P2-3	865	1000	20	30	300	250

IRS						
Ch.	central wavelength [μm]	IFOV[m]	Δλ[μm]	L _λ [W/m ² /str/μm] or Tstd[K]	L _{max} [W/m ² /str/μm] or T _{max} [K]	S/Nor NEdT@300[K]
SW1	1.05	1000	0.02	57	248	500
SW2	1.38	1000	0.02	8	103	150
SW3	1.63	250	0.2	3	50	57
SW4	2.21	1000	0.05	1.9	20	211
T1	10.8	500	0.7	300	340	0.2
T2	12.0	500	0.7	300	340	0.2

Standard products (land)

products	GSD	accuracy
radiance	250/1000m	5%, 0.5K
geom. corr. rad.	250m	0.5pixel
land surface refl.	250m	5%/10%* ¹
veg. index	250m	20%/15%* ²
veg. roughness. index	1km	20%/15%* ²
shadow index	1km	20%/15%* ²
land surf. temp	500m	2.5K
fAPAR	250m	30%/20%* ²
LAI	250m	30%
above ground biomass	1km	30%

*1 : >443nm / ≤443nm

*2 : grass land / forest

H. Shimoda


Research products (land)

products	GSD	accuracy
net primary prod.	1km	TBD
veg. water stress index	500m	TBD
fire	500m	TBD
land cover class.	250m	TBD
land surface albedo	1km	TBD

NRC Decadal Survey HyspIRI


Visible ShortWave InfraRed (VSWIR) Imaging Spectrometer
+
Multispectral Thermal InfraRed (TIR) Scanner

VSWIR: Plant Physiology and Function Types (PPFT)

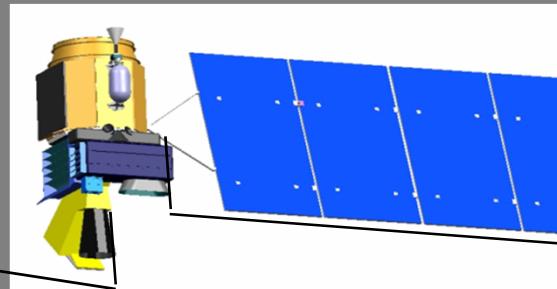


Multispectral TIR Scanner

Map of dominant tree species, Bartlett Forest, NH

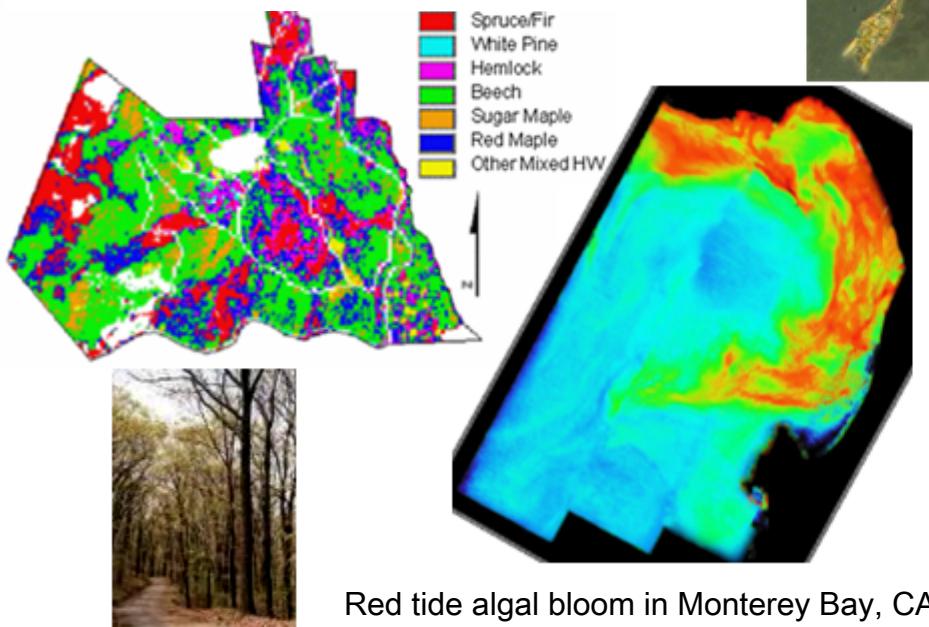

Red tide algal bloom in Monterey Bay, CA

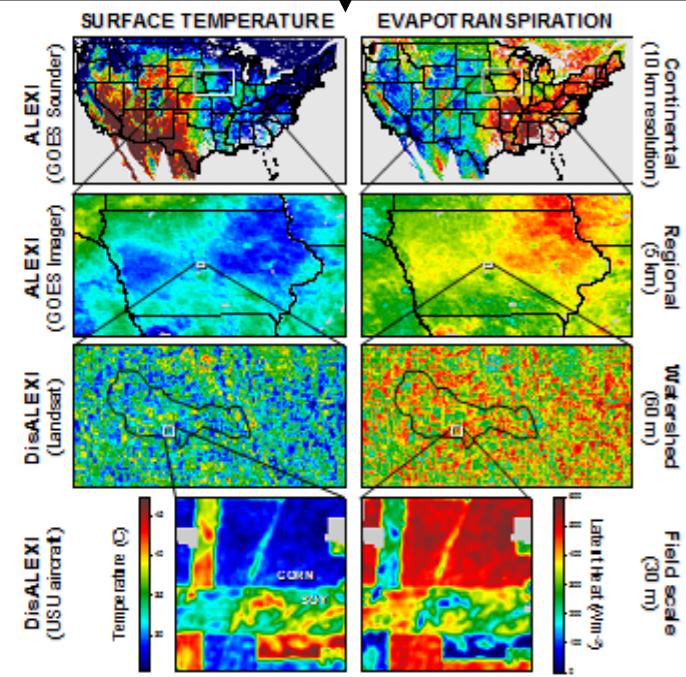


R. Green and S. Hook, NASA JPL


HyspIRI (2019)

- Hyperspectral sensor
 - 380 nm – 2500 nm
 - 60 m spatial resolution
 - 90 km swath, 19-day revisit time
- Thermal sensor
 - 8 bands
 - mid-IR fire band (1200 K saturation!)
 - 60 m spatial resolution
 - 400 km swath, 5-day revisit time
- Acquisition over global land and shallow water
- Direct broadcast capability

HyspIRI Thermal Bands

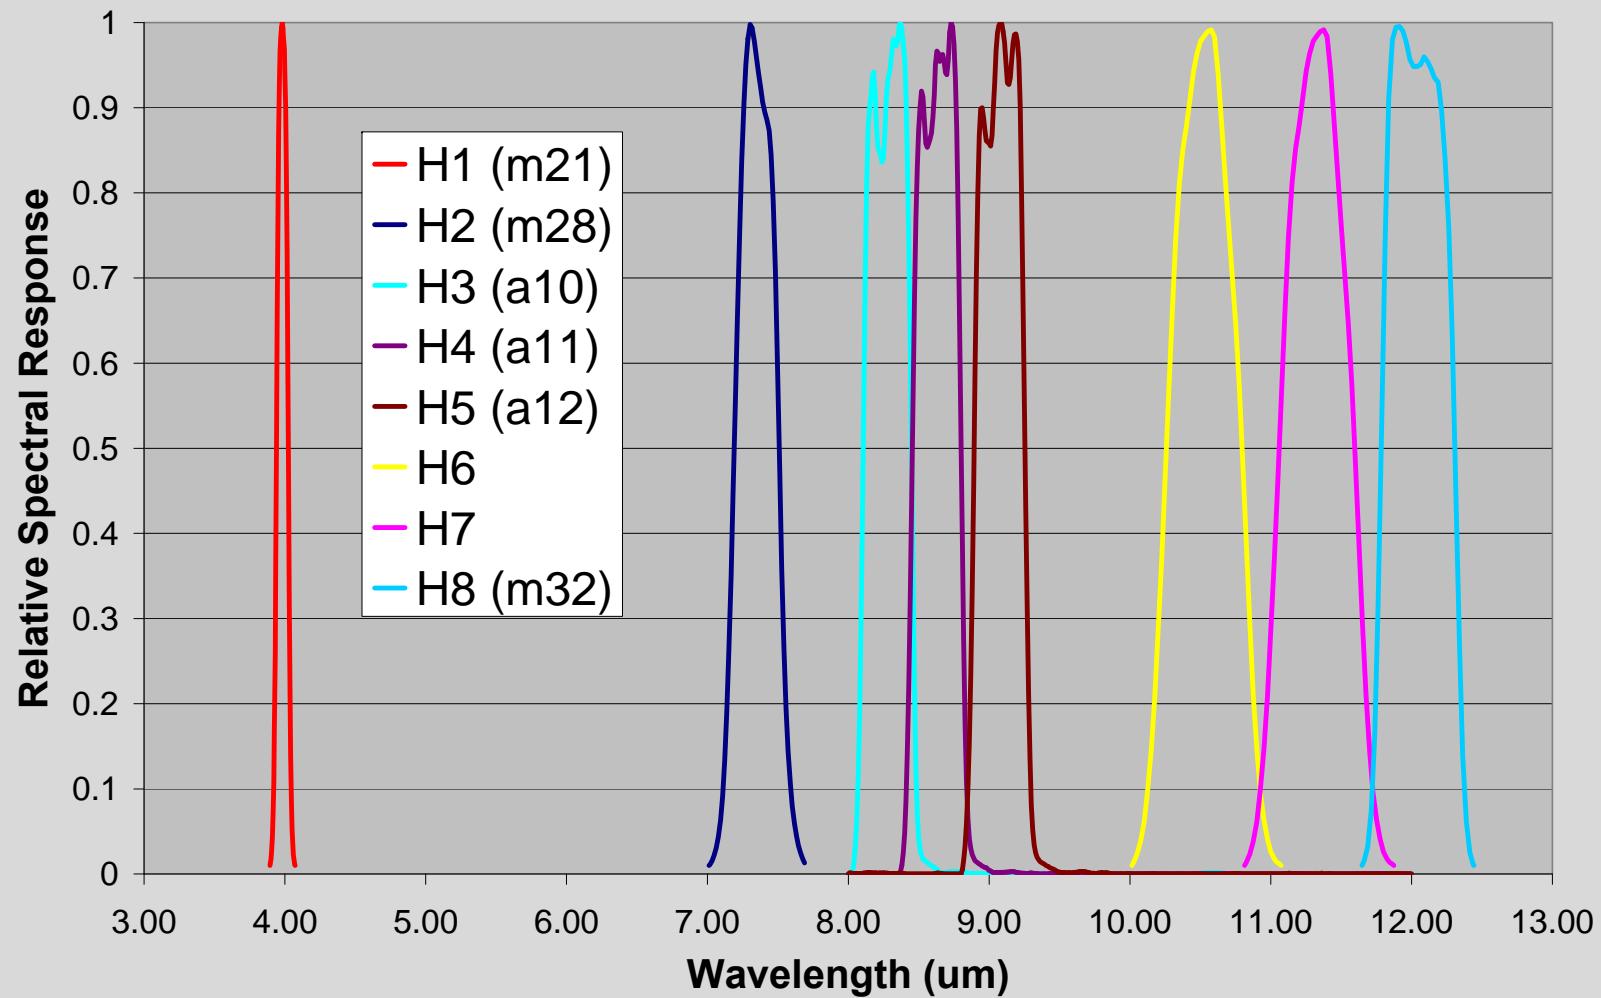

HyspIRI Detection Envelope

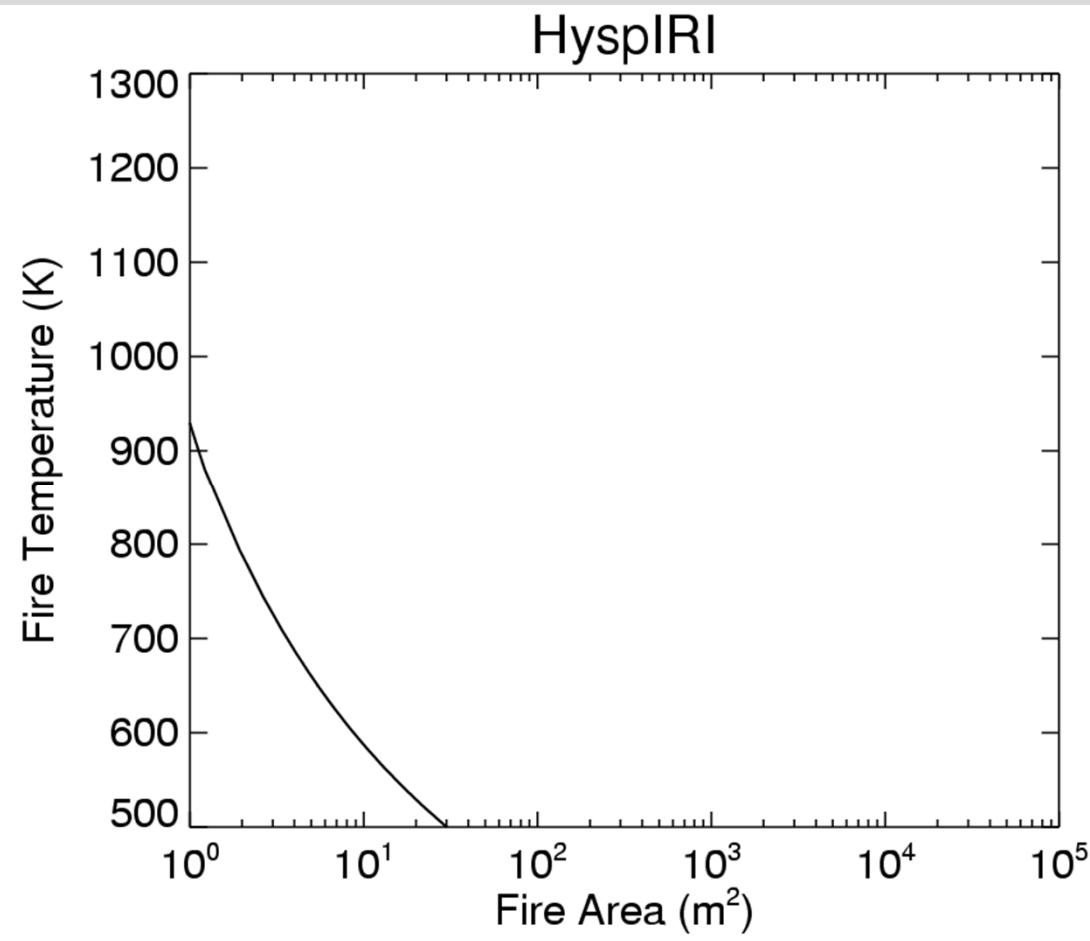


60 m


90% probability of detection; boreal forest; nadir view

HyspIRI Ground Coverage

TIR (600 km)



VSWNIR
Swath (151 km)

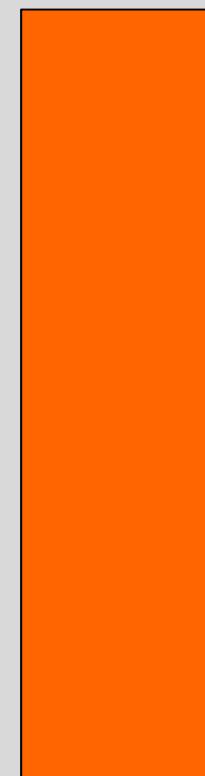


GOES-ABI (Advanced Baseline Imager) 2015 Launch


GOES-R slides courtesy of Ivan Csiszar (NOAA-NESDIS)

GOES-R Mission

US GOES Imager Coverage

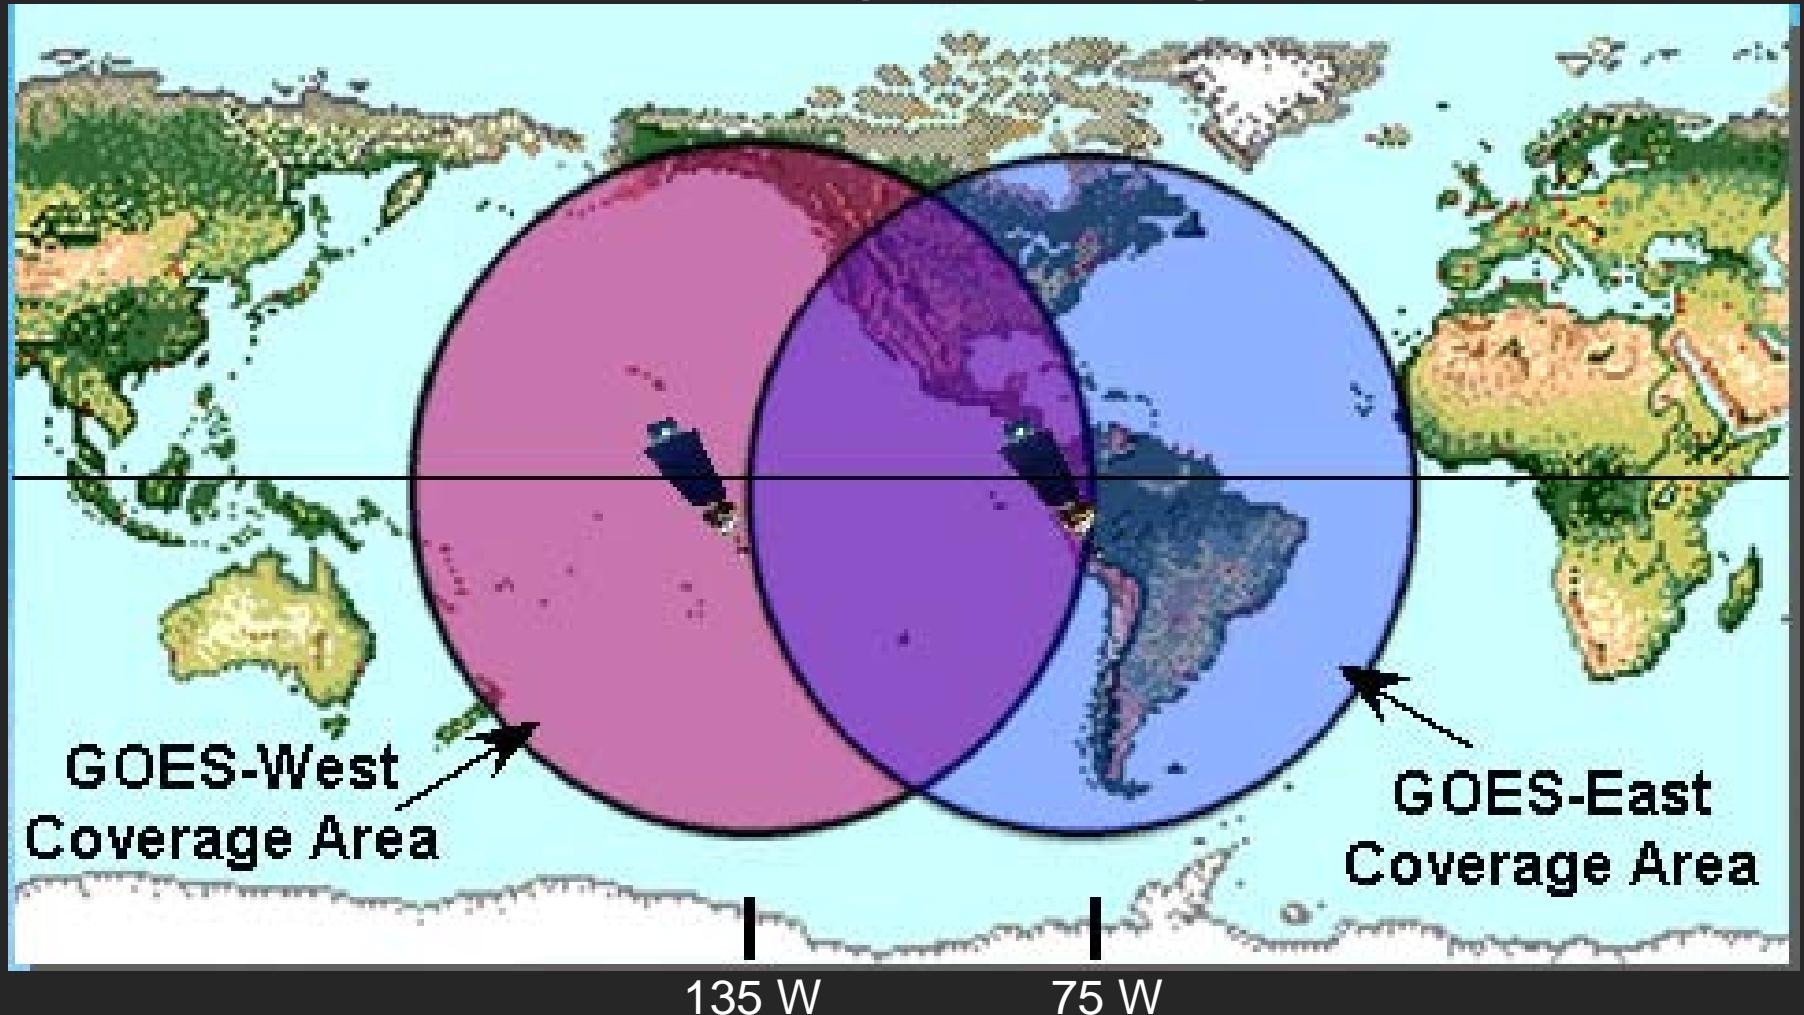

ABI Sensor -- Scan Mode

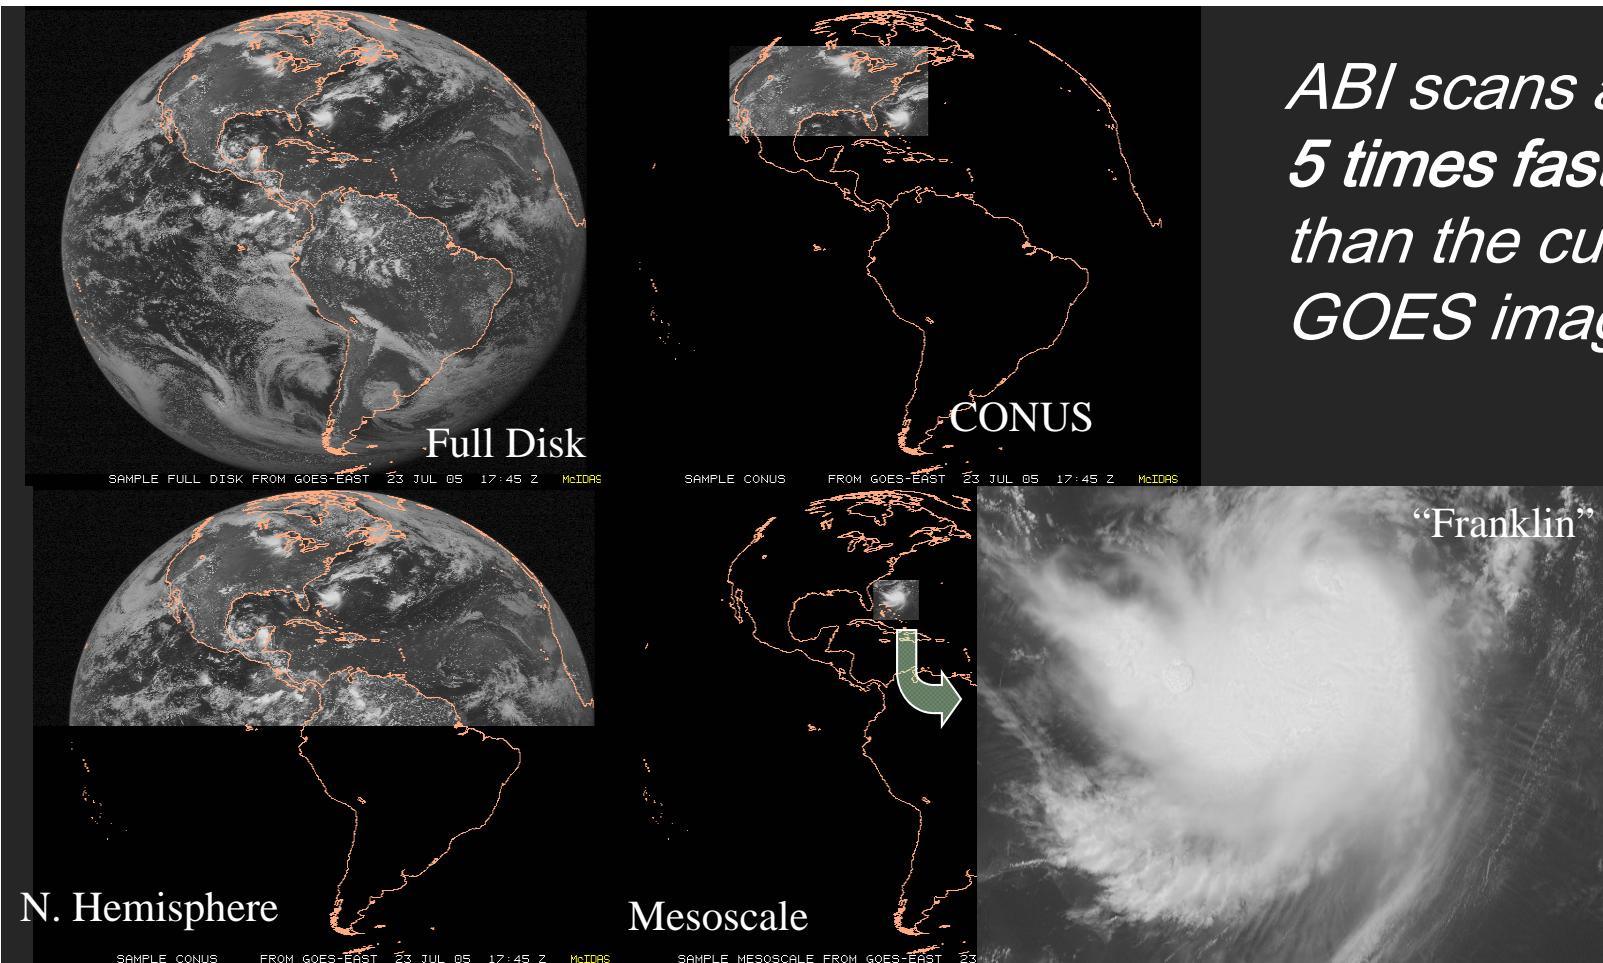

*ABI scans about
5 times faster
than the current
GOES imager*

There are two anticipated scan modes for the ABI:

- Full disk images every 15 minutes + 5 min CONUS images + mesoscale
- Or, full disk every 5 minutes

ABI Sensor Channels

GOES ABI Band	Central Wavelength (μm)	sub-satellite IGFOV (km)	Land Product Use
1	0.47	1	Albedo
2	0.64	0.5	Fire, albedo, NDVI/GVF Flood
3	0.865	1	Albedo, NDVI/GVF, Flood
4	1.378	2	Albedo?
5	1.61	1	Albedo
6	2.25	2	Fire, Albedo
7	3.90	2	Fire
8	6.19	2	
9	6.95	2	
10	7.34	2	
11	8.5	2	
12	9.61	2	
13	10.35	2	Fire
14	11.2	2	LST, Fire, Flood
15	12.3	2	LST Fire, Flood
16	13.3	2	

SEVIRI as ABI Proxy

GOES-R ABI

Channel	Nominal Central Wavelength, μm
1	0.47
2	0.64
3	0.86
4	1.38
5	1.61
6	2.26
7	3.9
8	6.19
9	6.95
10	7.34
11	8.5
12	9.61
13	10.35
14	11.2
15	12.3
16	13.3

Observations every 15 min

Spatial resolution:

- 0.5 km visible
- 2 km all other

Position: 75W and 135W

Launch: 2014

MSG SEVIRI

Channel	Nominal Central Wavelength, μm
1	0.64
2	0.81
3	1.64
4	3.92
5	8.70
6	10.8
7	12.0
8	6.25
9	7.35
10	9.66
11	13.40
12	HRV


Observations every 15 min

Spatial resolution:

- 1 km HRV (visible)
- 4 km all other

Position: 0E

Launched: 2004

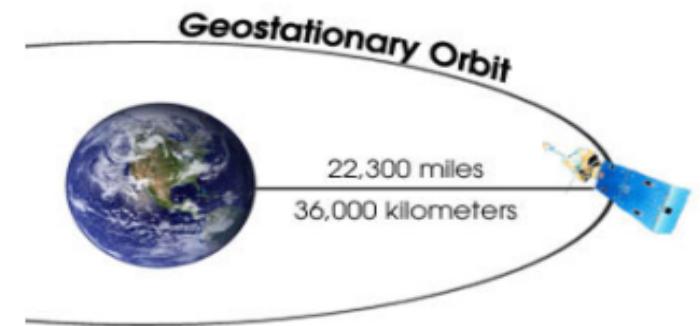

GOES: Geostationary Operational Environmental Satellite


ABI: Advanced Baseline Imager

MSG: Meteosat Second Generation


SEVIRI: Spinning Enhanced Visible and Infrared Imager

ABI Fire Product Comparisons with MODIS

Comparison of ABI WF_ABBA Fire Product with MODIS Fire Product in So. California
Date: October 27, 2003 Time: 20:55 UTC

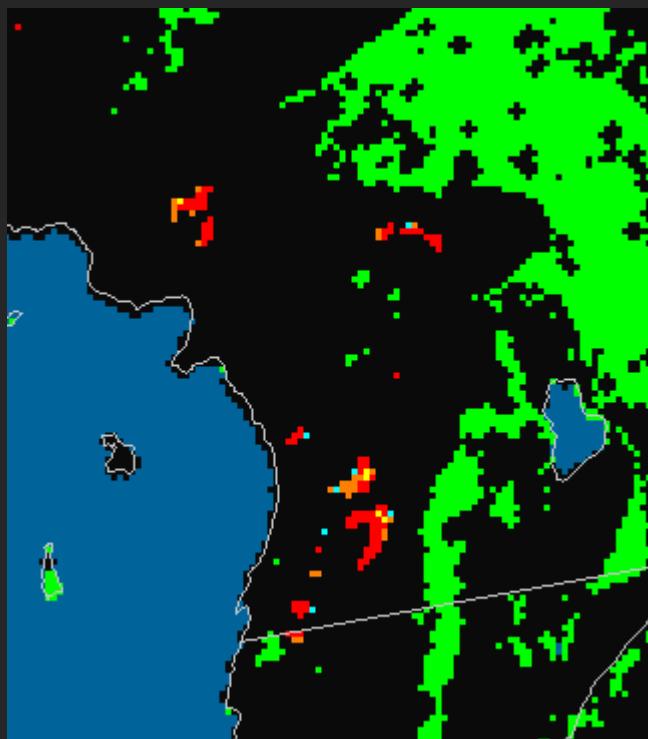

ABI WFABBA Fire Mask

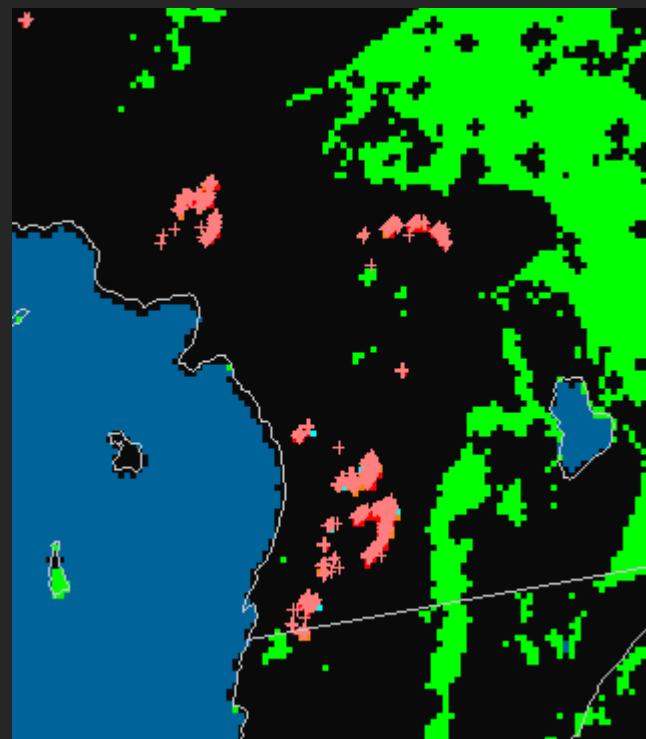

ABI WFABBA Fire Mask with MODIS overlay

Geo-Africa

- African Space Observatory Mission
- Geostationary satellite, 15 deg. E longitude
- Full African coverage every 4 days
- 90 300 km × 300 km scenes acquired per day
 - Pointable
- 25 m – 35 m resolution, 11 bands
- Possible 4 and 11 micron bands (?)
- 2014 operational time frame (?)

Possible Discussion Issues

- UNIFORM, MIROS
- Everything I missed
- Data availability
 - Free?
- Direct broadcast capability